




3H Communication Systems

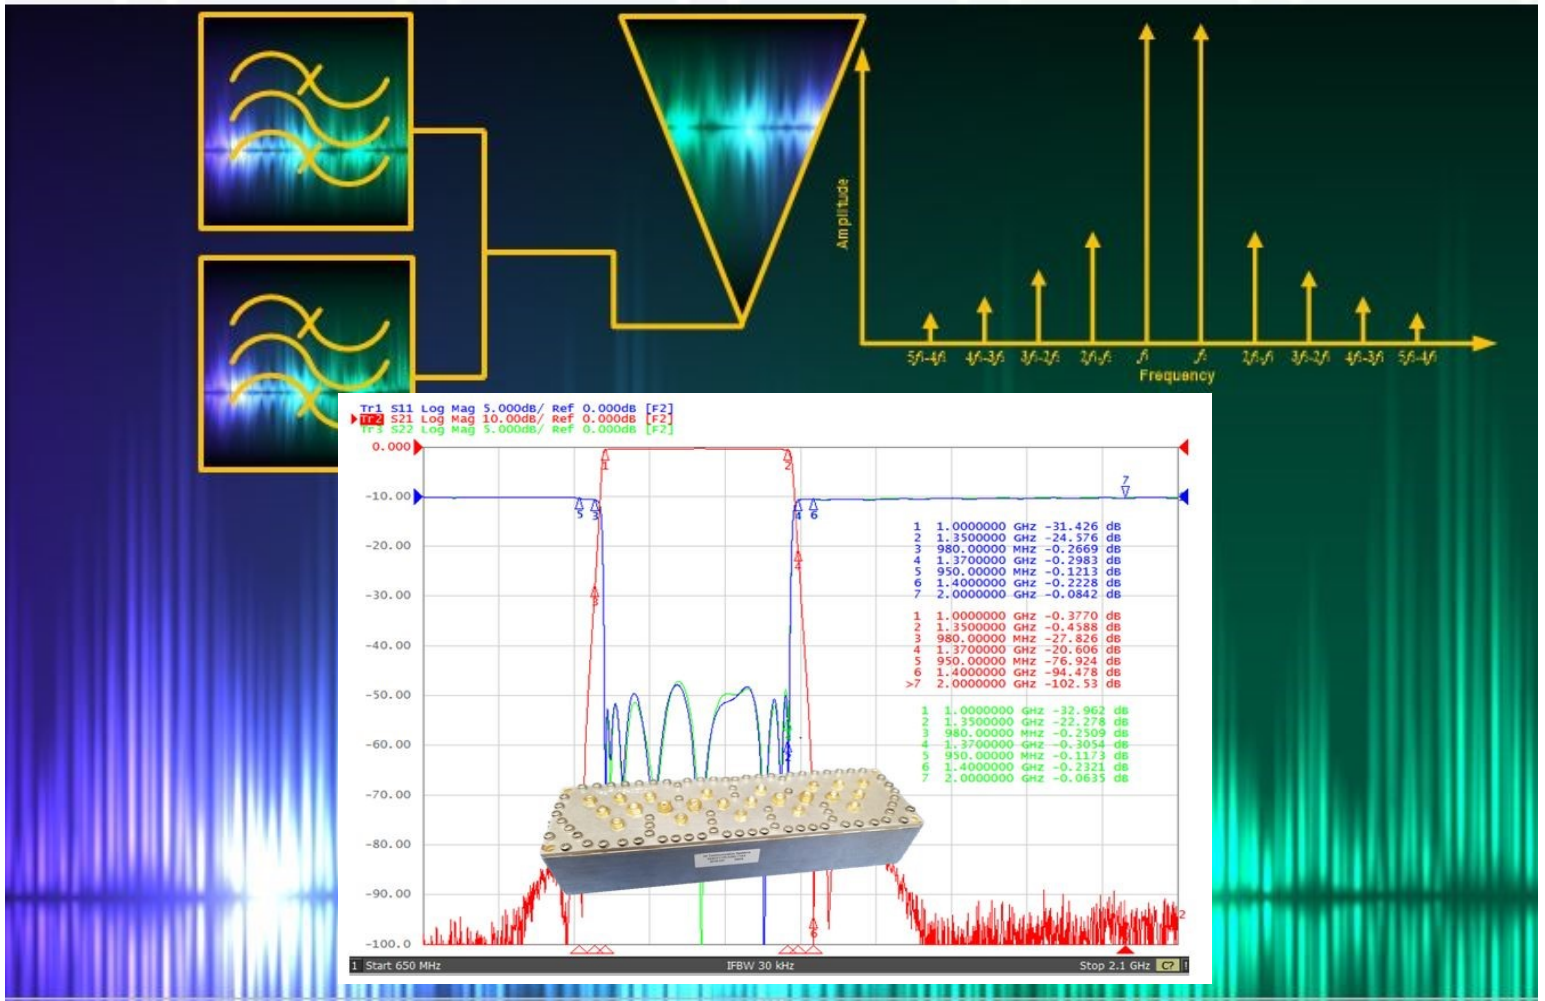

3H's new wide band cavity L-Band filter offers >70 dB attenuation 50 MHz away from bandedge while offering low passband insertion loss of <0.5 dB and meets Mil-Std-202 conditions.

Product Features

- Type: Bandpass Filter
- Passband : 1000 to 1350 MHz
- Passband Flatness: 0.25 dB
- Passband Insertion Loss: <0.5 dB
- Passband Return Loss: 18 dB
- Rejection: 70 dB @ DC to 950 MHz
- Rejection: 70 dB @ 1400 to 3000 MHz
- Size: 8.50" L x 2.5" W x 1.78"
- Meets Mil-Std-202 Conditions
- Power: 100 Watts, CW

3H Communication Systems offers a complete line of Microwave and RF filter products including Multiplexers, Duplexers, Switch Filter Banks and RF Front Ends. You can find out more about 3H products by visiting our website at www.3hcommunicationsystem.com or call us at 949-529-1583

Filters, Multiplexer, Switch Filter Banks, Radio Front End & Multi-Function Assemblies